

技术参数 (Specification)

1	额定电压 (Rated Voltage)	230 (VAC)
2	电压范围 (Voltage Range)	230±10% (VAC)
3	转速 (speed) (全载开状态 (In free blowing condition))	1600±5% (r/min)
4	功率 (power)	85±15% (W)
5	转速信号输出 Tach Pulse Output	2 pulse/rev
6	旋转方向 Rotation	CW (see from rotor)
7	绝缘等级 Insulation class	B级 (Class B)
8	工作制 Duty cycle	连续 (Continuous)
9	运行环境温度 Ambient temp	-25°C ~ +60°C
10	防护等级 Protected Class	IP55
11	动平衡 Dynamic balance	G6.3
12	电子保护 Electronic Protected	有 (Yes)
13	电磁兼容 EMC	发射 (Emission) EN55014-1 抗扰度 (Immunity) EN55014-2 谐波 (Harmonics) EN61000-3-2/3

电源线 (AC Power Cable)

NO.	Colour (颜色)	Definition (定义)	Gauge (线规)
1	棕 (brown)	L	UL2464
2	蓝 (blue)	N	20AWG
3	黄/绿 (Y/G)	PE	


控制线 (Control Cable)

NO.	Colour (颜色)	Function (功能)	Gauge (线规)
1	红 (red)	+10Vdc output	UL2464
2	蓝 (blue)	GND	22AWG
3	黄 (yellow)	0~10Vdc/PWM	
4	白 (white)	FG	

铭牌 (LABEL)



火线 (L) 230VAC  
零线 (N)  
地线 (PE)  
(0~10Vdc/PWM) Speed setting (GND)  
FG(2) Pulse/rev

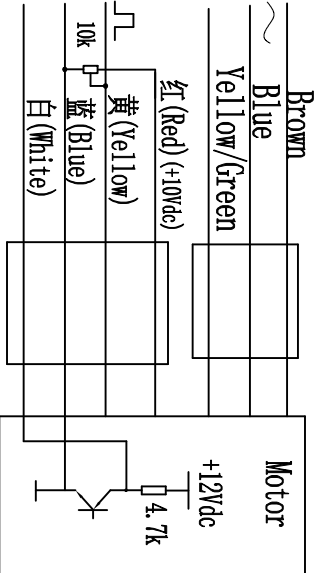

序号	物料编码	图样代号	物料名称	单重	数量	规格	备注
			常州祥明智能动力股份有限公司				
			外形图				物料编码:
			设计				图样代号:
			审核				
			工艺				
			标准化				
共 1 张 第 1 张 备注:							